


Programming instructions for the SWTRAN310M

Wikk's Wireless SWTRAN310M is compatible with Wikk's Receiver 2 Channel 300/310 operating at 310 frequency.

Programming -

- 1) Set the eight-digit dip switches on the SWTRAN310M to match the Receiver. Move the dip switches using a small pointed object, such as a paperclip, moving the dip switch switches to either the ON or OFF position.
- 2) Attach battery to the SWTRAN310M transmitter.
To test- Touch the two lead wires together causing LED on the transmitter to light up making the receiver respond. (The receiver will click and the red and green LED will light up.)
NOTE: When using Wikk's Receiver 2 Channel 300/310 with the SWTRAN310M make sure to remove both jumpers-SW1 and SW2 on the receiver (See Receiver 2 Channel 300/310 for wiring and programming)



Troubleshooting-

Problem

A) The receiver does not receive the transmitter signal and the transmitter LED will not light up.

B) The operating is very weak or sporadic.

C) The transmitter LED is on but the receiver does not receive the transmitter signal.

3) Attach quick connects to switch. Twist wires from switch and transmitter together and insert into the gel connector and crimp.

Technical Specifications-

Operating Frequency- 310 Mhz
Battery- 9 Volt DC
Number Combinations- 256
Operating temperature- -20° F - 100° F

Solution

Change the battery

Change the battery or check the wiring on the transmitter or receiver to make sure wires are secure and not pinched.

Check the dip switches code to make sure the transmitter and receiver are the same.

Technical Specifications-

Warranty

The warranty period of Wikk's Wireless SWTRAN310M transmitters is 24 months, beginning from the manufacturing date of the transmitter. During this period, if the product does not operate correctly, due to a defective component, the product will be repaired or replaced at the sole discretion of Wikk Wireless. The warranty does not extend to replacement of the battery.

Note: Any changes or modifications to Wikk's Wireless products could void the manufacturer's warranty.

Wikk Wireless SWTRAN310M
Type- CCF3001B
FCC ID: SU7CCF3001B

This device complies with Part 15 of the FCC Rules.




Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept interference received, including interference that may cause undesired operation.



6169 Industrial Ct.
P.O. Box 167
Greendale, WI 53129
Phone Toll Free-877-421-9490
Fax- 877-421-3158



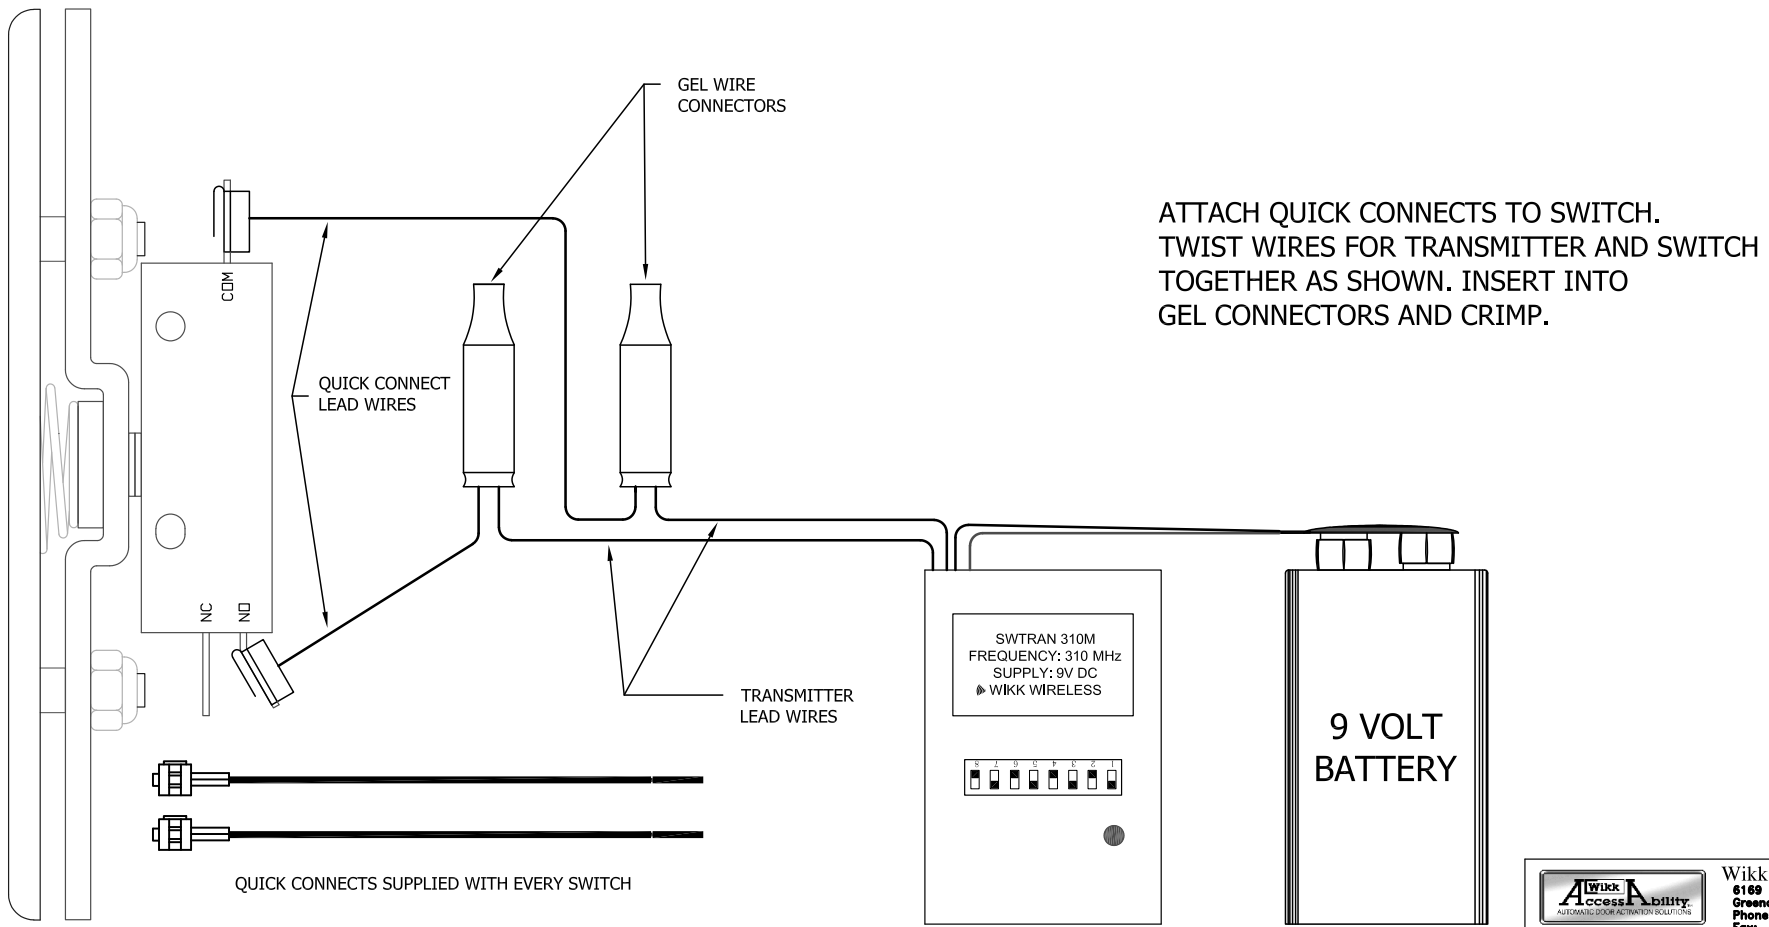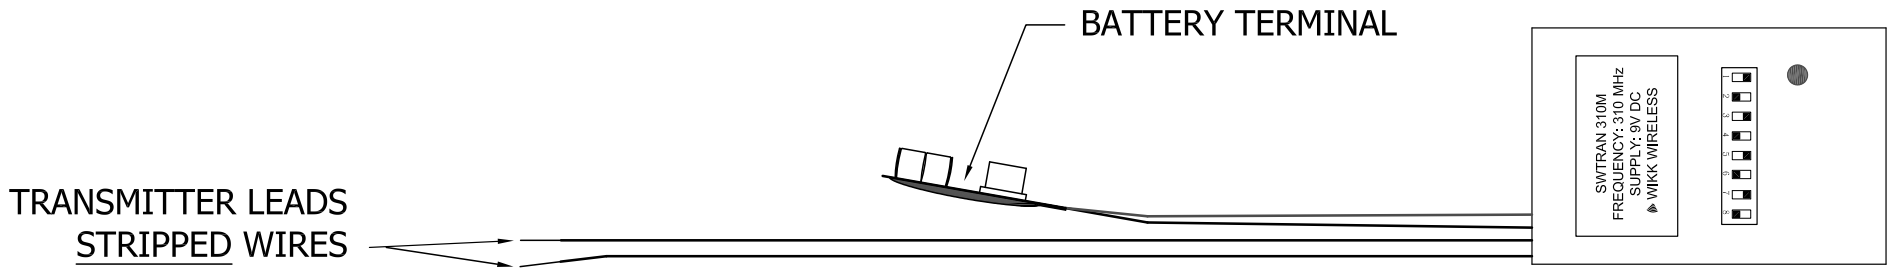

WIKK AccessAbility
AUTOMATIC DOOR ACTIVATION SOLUTIONS

Wikk Industries, Inc.
6189 Industrial Court
Greendale, WI 53128-0167
Phone: 877-421-9490
Fax: 877-421-3158

SCALE FULL	DRAWN BY/DATE JK/18OCT11	CHECKED BY/DATE -----
TITLE 310M TRANSMITTER INFO		
DRAWING NUMBER SWITCHES\TRANSMITTER AND RECEIVER LABELS AND INFO\ 310M TRANSMITTER INFO		