
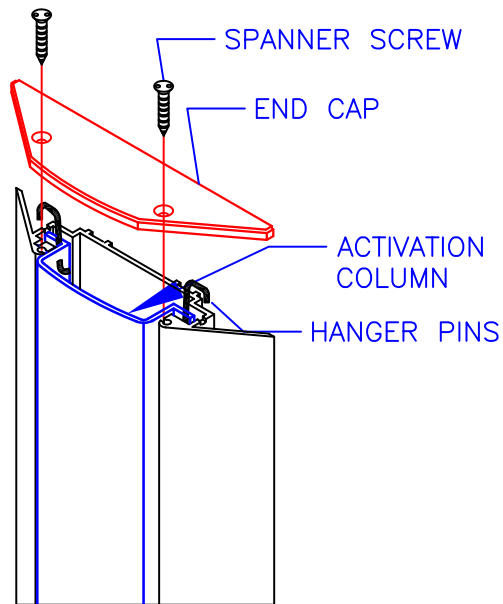


INGRESS'R®

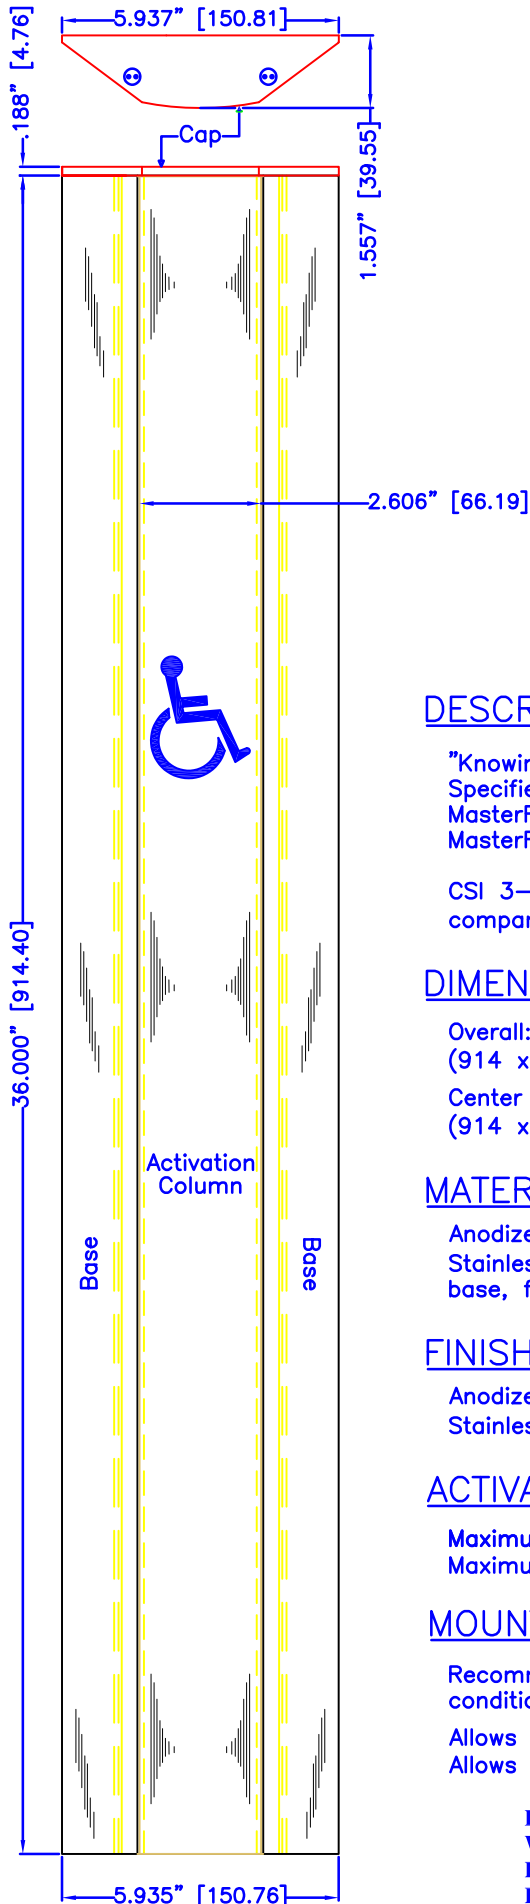

DESCRIPTION:

"Knowing Act" automatic door control with contoured profile.
Specified in:
MasterFormat™ 1995: Section 08 710 DOOR HARDWARE
MasterFormat™ 2004: Section 08 7120 AUTOMATIC DOOR CONTROLS

CSI 3-Part Format Guide Specifications are available for download on the company website: <http://www.wikk.com/>

DIMENSIONS:

Overall: 36" height x 6" wide X 1-1/2" deep
(914 x 152 x 38mm)

Center activation column: 36" x 2-1/2"
(914 x 64mm)

MATERIALS:

Anodized Aluminum extrusion; Alloy 6063 T5. Typical thickness: 3/32 (2.4mm)
Stainless Steel: type 304, nominal 18/19 gauge sheet metal; clad aluminum base, formed activation column

FINISHES:

Anodized Aluminum: Clear-type 204 R1 satin, Dark Bronze-type 304 XDKBZ
Stainless Steel: Satin US32D

ACTIVATION:

Maximum horizontal movement of activation column: less than 1/4" (6mm)
Maximum horizontal force to activate: 283 grams at all points on column

MOUNTING HEIGHT:

Recommended at 3" from Finished Floor. Consideration can be given to existing conditions

Allows for activation from average footrest elevation in adult wheelchair users
Allows for various interior and exterior housekeeping activities

Designed and Manufactured by:
Wikk Industries Inc.
Phone 877-421-9490
Fax 877-421-3158
Email sales@wikk.com

Wikk
AccessAbility
AUTOMATIC DOOR ACTIVATION SOLUTIONS