



RECTANGULAR BOLLARD CHECK LIST

Wikk Industries, Inc.
6169 Industrial Court
Greendale, WI 53129-0167
Phone: 414-421-9490
Fax: 414-421-3158

DIMENSIONS AND MATERIALS

- 4" X 6" X .120" 304 STAINLESS
- 4" X 8" X .250" 304 STAINLESS
- 6" X 8" X .250" 304 STAINLESS
- 4" X 6" X .500" 6061 ALUMINUM**

All require welded caps and special bases
**For powder coating and painting only

LENGTH OF BOLLARD

- 42" STANDARD SURFACE MOUNT
- 54" STANDARD INGROUND
- OTHER (SPECIFY ON DRAWING)

MOUNTING

- WELDED BASE PLATE SURFACE MOUNT
- INGROUND
- OTHER i.e. Wall Mount, etc.

PREPS

NUMBER OF PREPS NEEDED _____

TYPES OF PREPS

- NARROW
- SINGLE GANG
- DOUBLE GANG
- CARD READER (SPECIFY MAKE AND MODEL AND SUPPLY TEMPLATE FOR MOUNTING)

- OTHER (SPECIFY TYPE i.e. holes etc.)

PREP HEIGHTS AND SPECIAL NOTES

FINISHES

STAINLESS STEEL

- US32D SATIN POLISHED
- US32 MIRROR POLISHED

PREP LOCATION (FACE)

- FRONT BACK
- LEFT HAND SIDE RIGHT HAND SIDE
(as viewed from front)

BOLLARD TOP (CAP)

- WELDED FLAT
- ANGLED TOWARDS FRONT (WELDED)
- ANGLED TOWARDS BACK (WELDED)



NOTE: Specify the degree of the angle.
45 degrees is standard but other angles are available
in 5 degree increments i.e. 30, 35, 40, etc.

Please contact us if what you are looking for is not
listed on this sheet

RECTANGULAR BOLLARD


NOTE: MAXIMUM ADA RECOMMENDED HEIGHT FOR HANDICAP ACTUATOR IS 48" FROM FINISHED FLOOR

DIMENSIONS

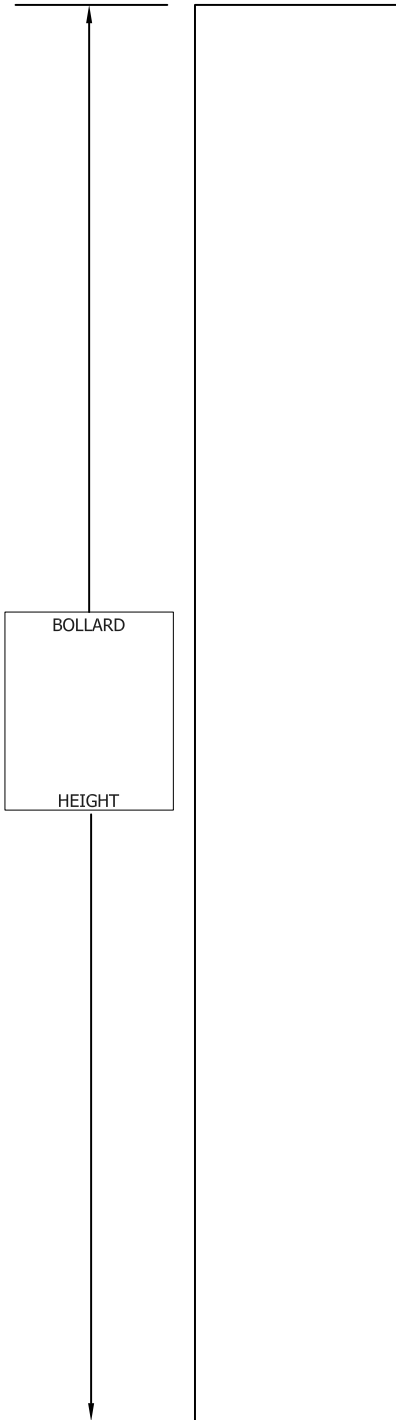


STANDARD PREPS


SINGLE GANG MOUNT

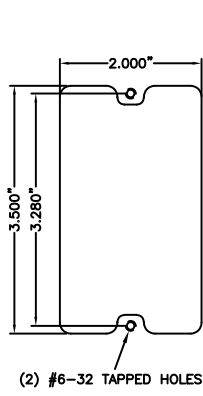

DOUBLE GANG MOUNT

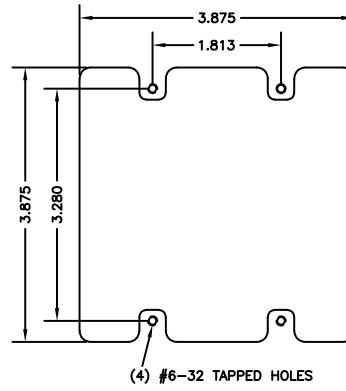

AA PREP (narrow)



PREP HEIGHT (FROM FINISHED FLOOR)


TOP OPTIONS (welded)



ANGLE TOP



FRONT SLANT



ANGLE TOP



BACK SLANT



FLAT TOP

