



SQUARE BOLLARD CHECK LIST

Wikk Industries, Inc.
6169 Industrial Court
Greendale, WI 53129-0167
Phone: 414-421-9490
Fax: 414-421-3158

DIMENSIONS AND MATERIALS

- 3" X 3" X .125" S.S.304 ONLY
- 4" X 4" X .125" S.S.304 ALUMINUM
- 6" X 6" X .125" S.S.304 ALUMINUM

LENGTH OF BOLLARD/MOUNTING

- 42" STANDARD SURFACE MOUNT
- 54" STANDARD INGROUND
- OTHER LENGTH (SPECIFY ON DRAWING)
- OTHER MOUNT i.e. wall mount, welded base plate, etc.
NOTE 3X3 Bollard available as inground or with welded base plate for mounting only.

PREPS

NUMBER OF PREPS NEEDED _____

TYPES OF PREPS

- NARROW
 - SINGLE GANG
 - DOUBLE GANG
 - INGRESS'R
 - CARD READER (SPECIFY MAKE AND MODEL AND SUPPLY A TEMPLATE FOR MOUNTING)
- _____

- OTHER (SPECIFY TYPE i.e. holes etc.)
- _____
- _____

PREP HEIGHTS AND SPECIAL NOTES

FINISHES

STAINLESS STEEL

- US32D SATIN POLISHED
- US32 MIRROR POLISHED

ANODIZED ALUMINUM

- CLEAR DARK BRONZE LIGHT BRONZE
- BLACK CUSTOM ANODIZING

MILL ALUMINUM

- POWDER COATED - SPECIFY COLOR CODE _____
- PAINTED - SPECIFY COLOR CODE _____
- MANUFACTURER OF COLOR CODE _____

* NOTE * Any aluminum bollard requiring welding i.e. angle tops, welded flat tops, or welded inserts will need to be powder coated or painted.

See color chart on our website at www.wikk.com or request one by e-mail at customerservice@wikk.com

PREP LOCATION (FACE)

- FRONT BACK
- LEFT HAND SIDE RIGHT HAND SIDE
(as viewed from front)


BOLLARD TOP (CAP)

- REMOVABLE BLACK ABS
- REMOVABLE STAINLESS STEEL
- WELDED FLAT
- ANGLED TOWARDS FRONT FACE
- ANGLED TOWARDS BACK

* NOTE * Specify the degree of the angle. 45 degrees is standard but other angles are available in 5 degree increments i.e. 30, 35, 40, etc.

Please contact us if what you are looking for is not listed on this sheet.


SQUARE BOLLARD



NOTE: MAXIMUM ADA RECOMMENDED HEIGHT FOR HANDICAP ACTUATOR IS 48" FROM FINISHED FLOOR

STANDARD PREPS


SINGLE GANG MOUNT

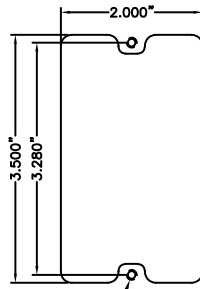

(2) #6-32 TAPPED HOLES




DOUBLE GANG MOUNT

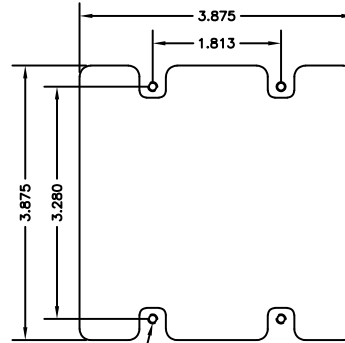

(4) #6-32 TAPPED HOLES




AA PREP
(narrow)



(2) #6-32 TAPPED HOLES



PREP HEIGHT
(FROM FINISHED FLOOR)

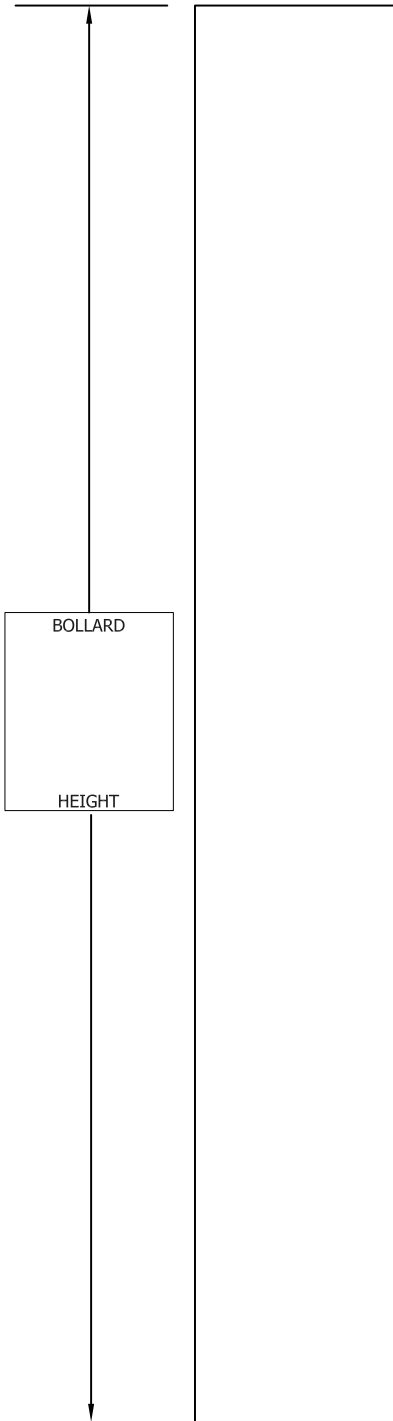


TOP OPTIONS



ANGLE
TOP



FRONT SLANT
WELDED



ANGLE
TOP



BACK SLANT
WELDED



FLAT
TOP



REMOVABLE OR
WELDED